

# ORIGINAL RANGE

The original Jubilee® Clip; our patented invention that founded our company and a whole industry. Our sturdy worm drive hose clip is highly versatile and finds applications in every industry. Available as a mild steel zinc protected or stainless steel clamp in both 304 (18/8) and 316 (18/10) grades of stainless steel; our product uniquely has a band that is continuously threaded, enabling extra flexibility when adjusting the clip to the correct size. The smooth inside profile of the band and rolled edges give protection for all types of hoses including soft hoses made from rubber or silicone.




Our original Jubilee® Clips are independently tested by the British Standards Institute (BSi) and carry the British Standard Kitemark™, which is universally regarded as the most stringent Standard there is for a hose clip. Both grades of stainless steel clips are also certified by Lloyd's Register for marine use.

At Jubilee® we never mix materials, as this ensures highest levels of corrosion resistance, whereas when using mixed materials, such as in W2 hose clips, one material will be sacrificed in favour of another and will corrode much quicker than when only one material is used.



- Made to BS 5315
- Meet DIN 3017-1 and SS 2298 requirements
- Conform to SAE J1508 type FE
- Stainless steel versions are approved by Lloyds Register for use in Marine, Offshore and Industrial applications

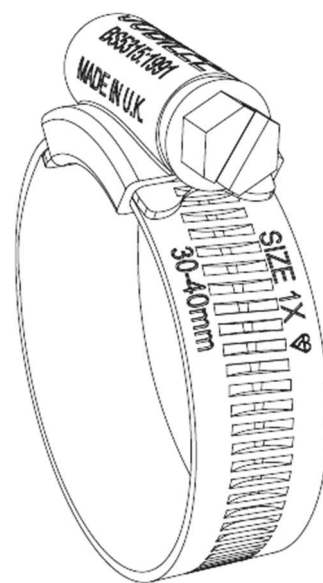

## Available In



Mild Steel Zinc Protected

304 Stainless Steel

316 Stainless Steel

# ORIGINAL RANGE

## Mild Steel Zinc Protected



| Part No. | BS No. | Adjustment<br>mm | Adjustment<br>Inches | Band<br>Width<br>mm | Band<br>Thickness<br>mm | Recommended<br>Torque<br>Nm | Maximum<br>Torque<br>Nm | Maximum<br>Pressure<br>PSI | Part No. |
|----------|--------|------------------|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------|
| 000MS    | 12     | 9.5- 12          | 3/8- 1/2             | 9.3                 | 0.7                     | 3.4                         | 4.5                     | 203                        | 000MS    |
| M00MS    | 16     | 11- 16           | 1/2-5/8              | 9.3                 | 0.7                     | 3.4                         | 4.5                     | 203                        | M00MS    |
| 00MS     | 20     | 13- 20           | 1/2-3/4              | 9.3                 | 0.7                     | 3.4                         | 4.5                     | 203                        | 00MS     |
| 0MS      | 22     | 16- 22           | 5/8- 7/8             | 12.7                | 0.9                     | 4.2                         | 5.6                     | 203                        | 0MS      |
| 0XMS     | 25     | 18- 25           | 3/4-1                | 12.7                | 0.9                     | 4.2                         | 5.6                     | 203                        | 0XMS     |
| 1AMS     | 30     | 22- 30           | 7/8-1 1/8            | 12.7                | 0.9                     | 5.1                         | 6.8                     | 203                        | 1AMS     |
| 1MS      | 35     | 25- 35           | 1-1 3/8              | 12.7                | 0.9                     | 5.1                         | 6.8                     | 102                        | 1MS      |
| 1XMS     | 40     | 30- 40           | 1 1/8-1 5/8          | 12.7                | 0.9                     | 5.1                         | 6.8                     | 102                        | 1XMS     |
| 1MMS     | 45     | 32- 45           | 1 1/4-1 3/4          | 12.7                | 0.9                     | 5.1                         | 6.8                     | 102                        | 1MMS     |
| 2AMS     | 50     | 35- 50           | 1 3/8-2              | 12.7                | 0.9                     | 5.9                         | 7.9                     | 102                        | 2AMS     |
| 2MS      | 55     | 40- 55           | 1 5/8-2 1/8          | 12.7                | 0.9                     | 5.9                         | 7.9                     | 102                        | 2MS      |
| 2XMS     | 60     | 45- 60           | 1 3/4-2 3/8          | 12.7                | 0.9                     | 5.9                         | 7.9                     | 102                        | 2XMS     |
| 3MS      | 70     | 55- 70           | 2 1/8-2 3/4          | 12.7                | 0.9                     | 6.7                         | 9                       | 102                        | 3MS      |
| 3XMS     | 80     | 60- 80           | 2 3/8-3 1/8          | 12.7                | 0.9                     | 6.7                         | 9                       | 44                         | 3XMS     |
| 4MS      | 90     | 70- 90           | 2 3/4-3 1/2          | 12.7                | 0.9                     | 6.7                         | 9                       | 44                         | 4MS      |
| 4XMS     | 100    | 85-100           | 3 1/4-4              | 12.7                | 0.9                     | 6.7                         | 9                       | 44                         | 4XMS     |
| 5MS      | 120    | 90-120           | 3 1/2-4 3/4          | 12.7                | 0.9                     | 6.7                         | 9                       | 44                         | 5MS      |
| 6MS      | 140    | 110-140          | 4 3/8-5 1/2          | 12.7                | 0.9                     | 6.7                         | 9                       | 44                         | 6MS      |
| 6XMS     | 150    | 120-150          | 4 3/4-5 7/8          | 12.7                | 0.9                     | 5.9                         | 7.9                     | 18                         | 6XMS     |
| 7MS      | 165    | 135-165          | 5 1/4-6 1/2          | 12.7                | 0.9                     | 5.9                         | 7.9                     | 18                         | 7MS      |
| 7.5MS    | 190    | 158-190          | 6 1/4-7 1/2          | 12.7                | 0.9                     | 5.9                         | 7.9                     | 18                         | 7.5MS    |
| 8.5MS    | 216    | 184-216          | 7 1/4-8 1/2          | 12.7                | 0.9                     | 5.9                         | 7.9                     | 18                         | 8.5MS    |
| 9.5MS    | 242    | 210-242          | 8 1/4-9 1/2          | 12.7                | 0.9                     | 5.9                         | 7.9                     | 18                         | 9.5MS    |
| 10.5MS   | 267    | 235-267          | 9 1/4-10 1/2         | 12.7                | 0.9                     | 5.9                         | 7.9                     | 18                         | 10.5MS   |
| 11.5MS   | 292    | 260-292          | 10 1/4-11 1/2        | 12.7                | 0.9                     | 5.9                         | 7.9                     | 18                         | 11.5MS   |
| 12.5MS   | 318    | 286-318          | 11 1/4-12 1/2        | 12.7                | 0.9                     | 5.9                         | 7.9                     | 18                         | 12.5MS   |

For larger sizes please contact us

### Quality Assurance



BS5315-1991  
KM06246



SAE J1508 Surface Vehicle Standards-Hose Clamp Specifications, Type FE is referenced in the quality control methods for the design/manufacture of Original Range Jubilee Clips.

Mild Steel Zinc Protected

### Corrosion Resistance

240 hours NSS Test

### Fastening

7mm A/F screw

### Industry Recommendations

