




## ALUMINIUM TAPE 30µm

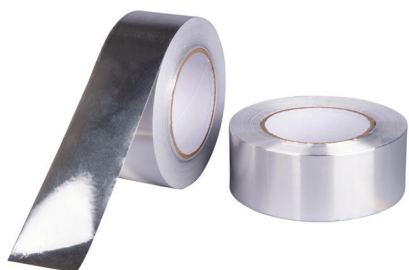

- Conformable aluminium tape based on a 30 micron aluminium foil, a transparent solvent acrylic adhesive and a white, single sided siliconised paper liner.
- The tape is suitable for interior and exterior use and can be used at high and low temperatures.
- Repairing and bonding of metal.
- Joining insulation panels in the building industry
- Joining aluminium pipes in the air conditioning and ventilation sector
- General purpose applications such as holding, patching, sealing and masking.
- To make substrates electrically and thermally conductive
- Temporary and permanent bonding under extreme circumstances.
- Low moisture vapor transmission rate offers excellent sealing and patching performance.

Art. No.	width	length	colour	Pack.	EAN code
EL5050	50 mm	50 m	aluminium	24	5407004561967

**Adhesive:** Solvent acrylic

**Carrier:** Aluminium foil

**Maximum temperature:** 120°C

**Tensile strength:** 45 N/25 mm

**Adhesive strength:** 20 N/25 mm

**Thickness:** 0,07 mm

**HPX**

Frankrijkstraat 8 | 9140 Temse | België

T 0032 3 710 19 19 | F 0032 3 711 34 64 | [info@hpx.eu](mailto:info@hpx.eu) | [www.hpx.eu](http://www.hpx.eu)

