


STRUCTURAL DRAWING OF ANTI-SLIP TAPE 'GLOW IN THE DARK'

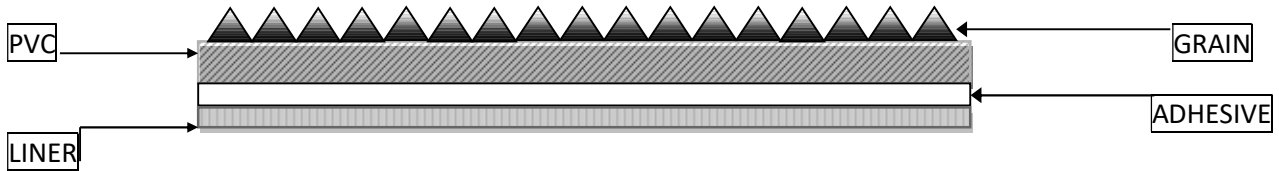

ANTI-SLIP TAPE DATA SHEET

1. BACK CARRIED	0.10 mm PVC + 0.17 mm liner (40% - 50%)
2. OVERALL THICKNESS	Grain 60# 0.80 ± 0.2 mm
3. LINER MATERIAL	ART RELEASE PAPER
4. GRAIN	Aluminium Oxide (45% - 50%)
5. TYPE OF ADHESIVE	Acrylic Solvent 0.07 mm (15%-20%)
6. ADHESION TO STEEL	1500 g/ins ↑
7. TENSILE	6.0 kg/ins ↑
8. ELONGATION AT BREAK	25% ↑
9. TEMPERATURE RANGE	- 5° C — 50° C
10. RESISTANCE TO WATER 30° warm water and soak for 1 hour – The tape must be left between 12-24hrs before it is put into contact with water.	GOOD
11. RESISTANCE TO SOLVENT	POOR
12. LUMINANCE	5 mcd/m2
AFTER 10 MINS	1 mcd/m2
AFTER 60 MINS	0 mcd/m2
AFTER 90 MINS	0,32 mcd/m2
NOTE: visible light level	

*The testing data will be different by the conditions