


## ANTI-SKID TAPE TECHNICAL DATA SHEET 'GLOW IN THE DARK'

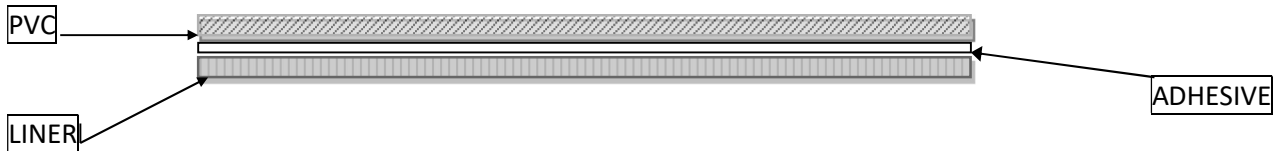

### ANTI-SKID TAPE DATA SHEET

1. BACK CARRIED	PVC LINER 0,86 ± 0.1 mm
2. OVERALL THICKNESS	1.1 ± 0.2 mm
3. LINER MATERIAL	ART RELEASE PAPER
4. TYPE OF ADHESIVE	Acrylic Solvent
5. ADHESION TO STEEL	> 1.5 kg/25mm
6. TENSILE	> 15.0 kg/25mm
7. ELONGATION AT BREAK	>35%
8. TEMPERATURE USAGE RANGE	- 5° C — 50° C
9. APPLICATION TEMPERATURE	10° C — 40° C
10. RESISTANCE TO WATER	GOOD 30° warm water and soak for 1 hour – The tape must be left between 12-24hrs before it is put into contact with water.
11. RESISTANCE TO SOLVENT	POOR
12. LUMINANCE	AFTER 10 MINS 5 mcd/m2
	AFTER 60 MINS 1 mcd/m2
	AFTER 90 MINS 0 mcd/m2
NOTE: visible light level	0,32 mcd/m2

\*The testing data will be different by the conditions

22-03-2016

REV 5: 12-2023