


## MOTIP Glass Fibre Putty Filled

## Technical Information

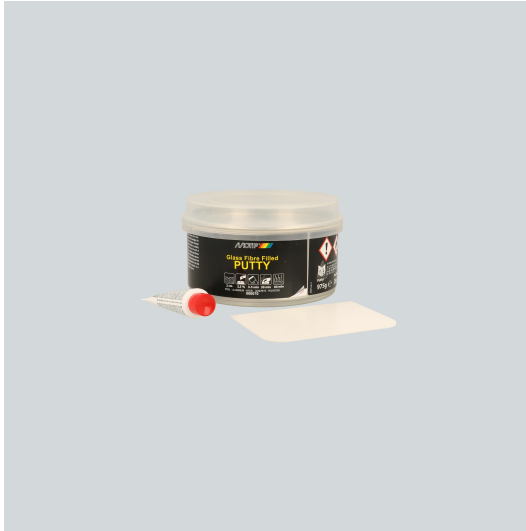

Fill deeper damage like holes in surfaces of steel, aluminium, wood, concrete and polyester with MOTIP 2-component Glass Fibre Putty (filled). Glass Fibre putty is easy to sand and has excellent filling properties. Glass Fibre putty offers high impact resistance and may be resprayed with all paints. It is resistant to chemicals and the weather and can be applied in layers up to 2 cm in thickness.

**Ord.-no:** 000053, 000062, 000070

---

### Quality & properties

- Easy to sand
- Excellent filling properties
- High impact resistance
- Re-sprayable with all lacquer systems
- Resistant to chemicals and weather influences
- Excellent adhesion

---

### Physical & chemical data

- Base: Polyester resin
- Colourname: grey
- Smell: Characteristic
- Degree of gloss: mat, 10 ±2
- Dust dry: 10 - 15 min
- Completely dry: 60 min
- Overcoatable: 60 min
- Sandable after: 30 min
- Surfaces: Steel, aluminium, wood, concrete, polyester
- Minimum Working Temperature: 10 °C
- Maximum Working Temperature: 25 °C
- Flash point: 31
- Potlife: 3-5 min
- Harder percentage: 2.5 %
- Storage stability: 2 years
- Content:
  - 250 G
  - 500 G
  - 1,00 KG

---

## How to use

Before use, carefully read the directions on the packaging and act accordingly

Processing temperature 15 – 25°C.

The surface should be clean, dry and free of grease. Remove loose old lacquer and rust and sand the surface

Mix the required amount of putty with the harder. Apply in the desired layer thickness. After hardening, sand and when desired apply a fine putty.

The drying time depends on the ambient temperature

After use, directly clean the tools used. Do not store the surplus material, mixed with harder, in the can.

## Environmentally sound

European Aerosols is committed to apply formulations without restricted or critical ingredients and to achieve best possible performance. The caps and packagings are made of recyclable material.

## Disposal

Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

## Marking/Labelling

All products made by European Aerosols comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

**As of August 4, 2025** – This release replaces all eventually earlier issued versions.