


MOTIP Fine Putty

Technical Information

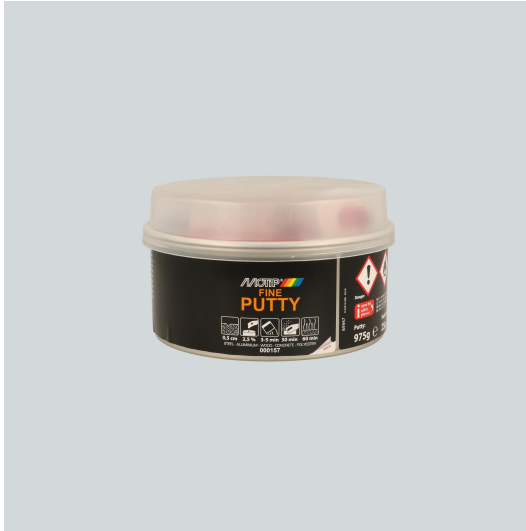

Level small irregularities in surfaces of steel, aluminium, wood, concrete and polyester on your car with MOTIP 2-component Fine Putty. Fine Putty is easy to sand, elastic and resprayable with all lacquer systems. Fine Putty has a very fine structure and excellent adhesion and is resistant to chemicals and the weather. MOTIP Fine Putty can be applied in layers with a thickness up to 0.5 cm.

Ord.-no: 000156, 000157

Quality & properties

- Easy to sand
- Elastic
- Re-sprayable with all lacquer systems
- Very fine structure
- Resistant to chemicals and weather influences
- Excellent adhesion

Physical & chemical data

- Base: Polyester resin
- Colourname: grey
- Smell: Characteristic
- Degree of gloss: mat, 10 ±2
- Dust dry: 10 - 15 min
- Completely dry: 60 min
- Overcoatable: 60 min
- Sandable after: 30 min
- Surfaces: Steel, aluminium, wood, concrete, polyester
- Minimum Working Temperature: 10 °C
- Maximum Working Temperature: 25 °C
- Flash point: 31 °C
- Potlife: 3-5 min
- Harder percentage: 2.5 %
- Storage stability: 2 years
- Content:
 - 250 G
 - 1,00 KG

How to use

Before use, carefully read the directions on the packaging and act accordingly.
Processing temperature 15 – 25°C.
The surface should be clean, dry and free of grease. Remove loose old lacquer and rust and sand the surface.
Mix the required amount of putty with the harder. Apply in the desired layer thickness.
The drying time depends on the ambient temperature.
After use, directly clean the tools used. Do not store the surplus material, mixed with harder, in the can.

Environmentally sound

European Aerosols is committed to apply formulations without restricted or critical ingredients and to achieve best possible performance. The caps and packagings are made of recyclable material.

Disposal

Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

Marking/Labelling

All products made by European Aerosols comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

As of August 4, 2025 – This release replaces all eventually earlier issued versions.